


# 螺旋洗罐喷嘴

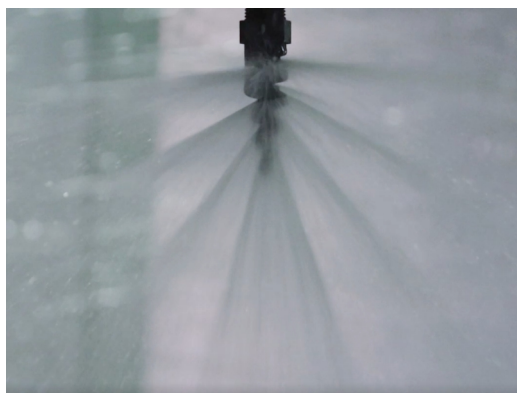

## 设计特点

防堵塞螺旋设计；高效节能；紧凑的设计；适合小开口  
易于维护；反向喷射的独特模式；流量：11.4 至 260 l/min


### 流量和尺寸

180° 和 270°、3/8"、1/2" 和 1" 管道尺寸


外螺纹管 道尺寸	喷嘴型号	可选择的角 度	K系数	每分钟升数					大约 (mm)		仅金属尺寸 (mm)			金属 重量(g)	
				0.7 bar	1 bar	2 bar	3 bar	4 bar	5 bar	可通过的直径	孔径直径	A	B		C
3/8	38SPJT-20-180	180°, 270°	13.7	11.4	13.7	19.3	23.7	27.3	30.6	4.83	3.30	73.0	17.5	92.1	49.6
	38SPJT-21-180	180°, 270°	18.5	15.4	18.5	26.1	32.0	36.9	41.3	5.59	3.30				
	38SPJT-22-180	180°, 270°	24.2	20.2	24.2	34.2	41.8	48.3	54.0	6.35	3.30				
	38SPJT-23-180	180°, 270°	37.6	31.5	37.6	53.2	65.1	75.2	84.1	7.87	3.30				
1/2	38SPJT-20-270	270°	54.9	46.0	54.9	77.7	95.1	110	123	10.4	4.32	22.2	108.0	181	
1	1SPJT-1-270	270°	116	97.2	116	164	201	232	260	14.2	5.08	28.7	146.1	298	

流量 (l/min) = K √ bar bar


标准材料：黄铜、316 不锈钢

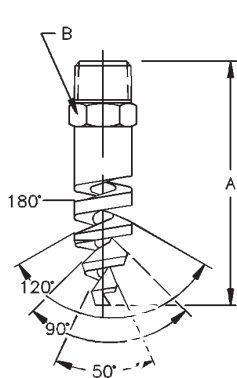


38SPJT-20-180

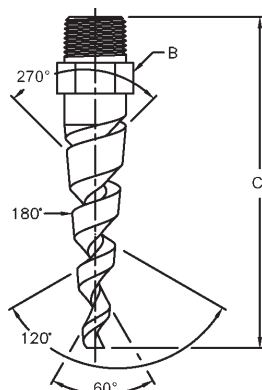

38SPJT-20-270

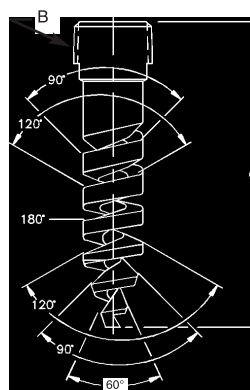

1SPJT-1-270

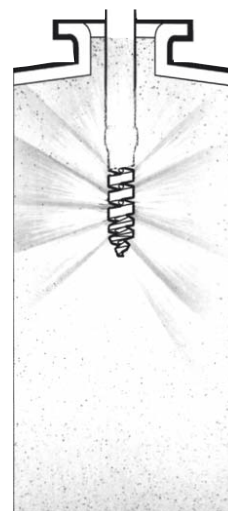

### 瓶罐清洗覆盖图

在 2-3 bar 压力下喷射时

管道尺寸	喷嘴型号	洗涤直径(mm)	冲洗直径(mm)
3/8	38SPJT-20-180	380	760
	38SPJT-21-180	460	1200
	38SPJT-22-180	610	1500
	38SPJT-23-180	910	2100
1/2	38SPJT-20-270	1200	2700
1	1SPJT-1-270	2400	6100